




HOW TO ORDER NU-BOLT™

THE MEASUREMENTS YOU'LL NEED:

X: Diameter of pipe. Either an exact measurement of the pipe and coating, or the pipe specs such as 8" or 10" API

Y: Thread length, so bolts reach past bottom of support.

Z: Bolt stock, so bolts fit through existing mounting holes.

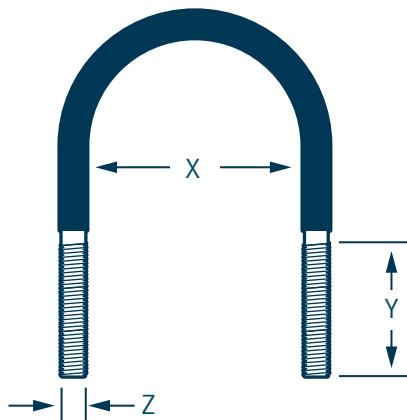

WHAT'S THE OPERATING TEMPERATURE?

Determine your pipe's maximum operating temperature.

Use standard **I-Rod** up to 181°F (83°C); **I-Rod HT** up to 340°F (171°C) and **PEEK** for temperatures up to 480°F (249°C). The maximum operating temperature for polyshrink on Nu-Bolts is 230°F.




CHOOSE A COATING FOR THE U-BOLT

Standard Nu-Bolts come with a long-lasting **hot-dip galvanized** finish. Other options include **316SS** or an ultra-durable **Sermagard** aluminum-ceramic coating for the harshest environments. Nu-Bolts are covered in polyshrink to protect the pipe coating during installation.

WHAT'S INCLUDED IN A NU-BOLT ASSEMBLY?

A Nu-Bolt assembly consists of one cut-and-drilled length of **I-Rod**, one **U-bolt** with polyshrink and **4 nuts**. Washers are not included, but can be ordered separately.

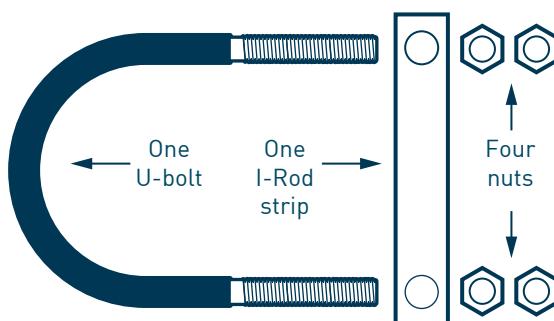

WHAT SIZE I-ROD IS REQUIRED?

Larger diameter I-Rod supports greater weights. Refer to the **sizing chart** on our Nu-Bolt web page or in our catalog to ensure adequate support for your load requirements.


(Shown at actual size)



3/4"



1"



Cross-section of I-Rod
1 1/2"

WHERE DO YOU ORDER I-ROD?

To order I-Rod, please call us at **+1 (713) 983-7117** between 8 A.M. and 5 P.M. Central, or email us at sales@stoprust.com. I-Rod is also available through our regional agents and Deepwater offices worldwide.



WHAT'S THE LEAD TIME?

Most orders for standard I-Rod are shipped within **five to seven** business days. Larger orders and those with special materials and finishes can require more time. Call us for more info.

HOW DOES IT SHIP?

The majority of our orders ship via **UPS**, although 10' strips of I-Rod must use LTL due to their lengths.

