
ELIMINATE CORROSION AT PIPE SUPPORTS

I-ROD[®]

PRODUCT CATALOGUE



[More info](#)

I-ROD®

ENDS CORROSION AT PIPE SUPPORTS

Corrosion at pipe supports is one of the leading causes of process piping failures, which can have potentially catastrophic results. All styles of pipe supports – including beam supports and pipe saddles – create crevices where water is trapped between the pipe and the support surface.

Corrosion can quickly undercut the paint film and cause wall loss. If these conditions are not addressed, entire sections of pipe can fail and require replacement. Deepwater developed the I-Rod® pipe-support system to ensure longer, safer lives for pipes by eliminating the crevices between pipes and supports.




Above, the result of crevice corrosion on a pipe. Trapped moisture has caused substantial wall loss that could result in catastrophic failure.



I-Rod® eliminates the crevice by minimising the contact area and allowing any moisture to evaporate. It's also much easier to inspect.

WHAT CAUSES CREVICE CORROSION?

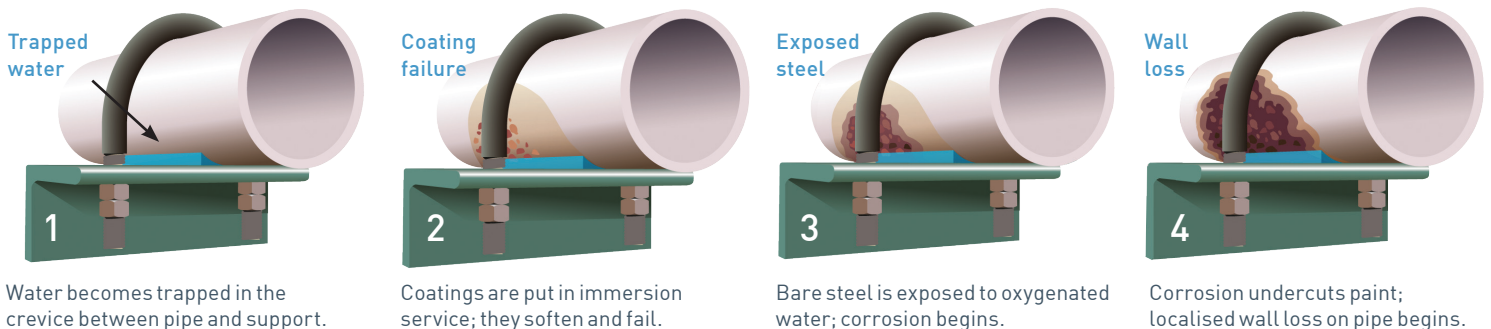

INDEX

- 3 How to order I-Rod®
- 4 Galvanised and oversize Nu-Bolt®
- 5 Nu-Bolts® with high-temperature Polyshrink™
- 6 Cut and drilled I-Rod® without U-bolt
- 7 316 SS, SERMAGARD® and Metric Nu-Bolts®
- 8 Non-gripping I-Rod® with flats and Nu-Bolt®
- 9 Non-gripping I-Rod® with flats and Nu-Bolt® XL
- 10 I-Rod® strips, I-Rod® plate, I-Rod® load values
- 11 U-bolts with Polyshrink™
- 12 U-bolts with high-temperature Polyshrink™
- 13 I-Rod® Clips, metric I-Rod® Clips for 360° clamps
- 14 I-Rod® Clips for 120° cradles, double-sided tape
- 15 Nuts, washers, I-Rod® adhesive
- 16 Nu-Bolt® torque values, 3D models
- 17 Temp. recommendations, custom sizes
- 18 I-Rod® installation tips
- 19 Make sure your I-Rod® is authentic
- 20 I-Rod® 28 year study


HOW A NU-BOLT® ASSEMBLY WORKS:

With the pipe elevated by I-Rod®, the water evaporates before the paint fails. Inspection is also far easier.

Nu-Bolts® are covered with PolyShrink™ to prevent damage to the pipe's coating during installation.

The pipe is supported by the half-round shape of I-Rod®, which minimises the contact area so water isn't trapped.

I-Rod® electrically isolates the pipe from metal supports, preventing galvanic corrosion between dissimilar metals.

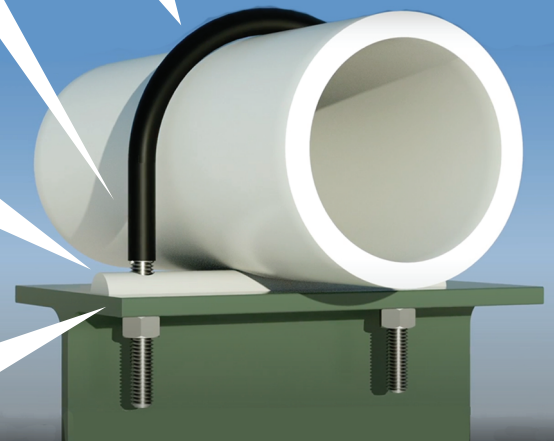


HOW TO ORDER

I-ROD®

WHAT SIZE I-ROD® IS REQUIRED?

Larger diameter I-Rod® supports greater weights (i.e. 1" I-Rod® can support up to 8,000 lb point load and 1 1/2" I-Rod® can support 10,000 lb point load). Refer to the sizing chart on page 10 to ensure adequate support for your load requirements.



CUSTOM SIZES FOR ALL I-ROD® PRODUCTS

If our standard sizes don't fit, we can provide custom sizes: **Please see page 17**

WHAT'S THE OPERATING TEMPERATURE?

Determine your pipe's maximum operating temperature. Use standard I-Rod® from -110°C (-166°F) up to 83°C (181°F); I-Rod® HT up to 171°C (340°F) and PEEK for temperatures up to 249°C (480°F). The maximum operating temp. for Polyshrink™ on Nu-Bolts™ is 110°C (230°F).



WHAT LENGTH?

Strips of I-Rod® are available in lengths of five feet, ten feet or one meter (3.28'). 2" I-Rod® is available in 8' lengths only.



NU-BOLT®


THE MEASUREMENTS YOU'LL NEED:

Diameter of pipe: Nominal pipe diameter.

D: Inside gap (shrink): Takes into account the thickness of the PolyShrink™. Gripping and non-gripping options available.

D2: Inside gap (bolt): Measurement of bolt only.

A: Bolt stock, so bolts fit through existing mounting holes.



CHOOSE A COATING FOR THE U-BOLT:


Standard Nu-Bolts® come with a long-lasting **hot-dip galvanised** finish. Other options include **316SS** or an ultra-durable **SERMAGARD®** aluminum-ceramic coating for the harshest environments. Nu-Bolts® are covered in Polyshrink™ to protect the pipe coating during installation.

I-ROD® CLIPS

THE MEASUREMENTS YOU'LL NEED:

X: Diameter of pipe. Either an exact measurement of the pipe and coating, or the pipe specs such as 8" or 10" API.

Y: Width of clamp. The clip snaps in place over the clamp.

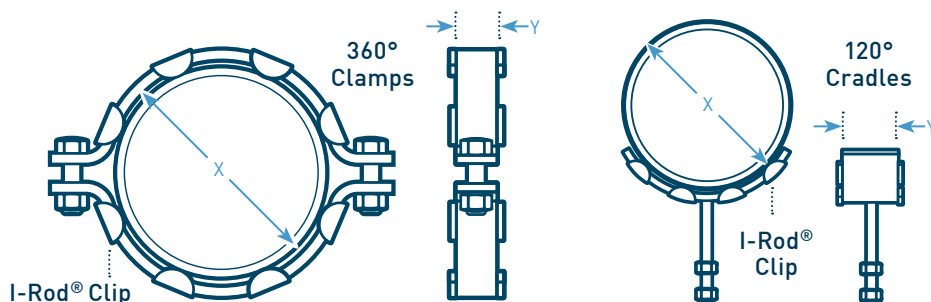

WHERE TO ORDER?

Call us at **+44 1483 600482** (UK), **+1 (713) 983-7117** (USA), or email us at **sales@stoprust.com**. I-Rod® is also available through our regional agents and Deepwater offices worldwide.

WHAT'S THE LEAD TIME?

Most orders for standard I-Rod® are shipped within **two business days**. Larger orders and those with special materials and finishes can require up to **four** days. Custom I-Rod® items can take **1-3 weeks**. Call us for more info.

HOW DOES IT SHIP?


The majority of our orders ship via **UPS**, although 10' strips of I-Rod must use LTL due to their lengths.



GALVANISED NU-BOLT®

PDF Nu-Bolt TechData Sheet

(See page 7 for metric galvanised Nu-Bolts®)

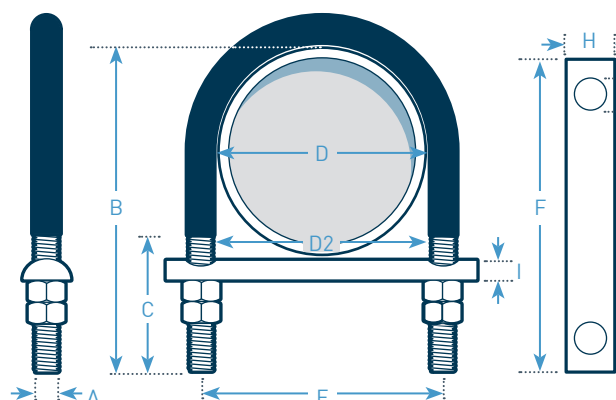

Includes:

- U-Bolt with Polyshrink™
- Four nuts
- Cut and drilled I-Rod®

Note: Maximum operating temp for Polyshrink™ is 110° C.

Note: Nu-Bolts® are shipped unassembled; pre-assembled Nu-Bolts® are available for an additional charge.



With I-Rod®
(white)

Min temp: -110° C
Max temp: 83° C



With I-Rod® HT
(amber)

Max temp: 171° C


	A	B	C	D	D2	E	F	G	H	I		
Nominal pipe size	Bolt diameter	U-bolt height	Thread length	Inside gap	Inside gap without shrink	Leg center	I-Rod length	I-Rod hole diameter	I-Rod width	I-Rod height	Part number	Part number
1/2"	1/4"	3 1/4"	2 3/8"	13/16"	15/16"	1 3/16"	2 1/2"	3/8"	3/4"	5/16"	NUB0045	NUB0431
1/2	3/8	3 1/4	2 3/8	13/16	15/16	1 5/16	2 1/2	1/2	1	7/16	NUB0046	NUB0193
3/4	1/4	3 5/16	2 3/8	1	1 1/8	1 3/8	3	3/8	3/4	5/16	NUB0071	NUB0408
3/4	3/8	3 5/16	2 3/8	1	1 1/8	1 1/2	3	1/2	1	7/16	NUB0074	NUB0398
1	1/4	3 7/16	2 3/8	1 1/4	1 3/8	1 5/8	3	3/8	3/4	5/16	NUB0047	NUB0198
1	3/8	3 7/16	2 3/8	1 1/4	1 3/8	1 3/4	3	1/2	1	7/16	NUB0001	NUB0194
1 1/4	3/8	3 3/4	2 1/2	1 9/16	1 11/16	2 1/16	3 1/2	1/2	1	7/16	NUB0013	NUB0409
1 1/2	3/8	4	2 1/2	1 7/8	2	2 3/8	4	1/2	1	7/16	NUB0052	NUB0196
2	3/8	4 1/2	2 1/2	2 5/16	2 7/16	2 13/16	4 1/2	1/2	1	7/16	NUB0009	NUB0199
2 1/2	1/2	5 1/4	3	2 13/16	2 15/16	3 7/16	5	5/8	1	7/16	NUB0017	NUB0432
2 1/2	1/2	5 1/4	3	3	3 1/8	3 5/8	5 3/16	5/8	1	7/16	NUB1487	NUB1494
3	1/2	5 13/16	3	3 7/16	3 9/16	4 1/16	6	5/8	1	7/16	NUB0057	NUB0200
4	1/2	6 13/16	3	4 7/16	4 9/16	5 1/16	7	5/8	1	7/16	NUB0060	NUB0195
5	1/2	7 13/16	3	5 1/2	5 5/8	6 1/8	8	5/8	1	7/16	NUB0063	NUB0433
6	5/8	9 1/2	3 3/4	6 5/8	6 3/4	7 3/8	9	11/16	1	7/16	NUB0064	NUB0067
8	5/8	11 1/2	3 3/4	8 5/8	8 3/4	9 3/8	11	11/16	1	7/16	NUB0077	NUB0079
10	3/4	13 13/16	4	10 3/4	10 7/8	11 5/8	13 1/2	7/8	1 1/2	11/16	NUB0003	NUB0224
12	7/8	16 1/16	4 1/8	12 3/4	12 7/8	13 3/4	16	1	1 1/2	11/16	NUB0085	NUB0225
14	7/8	17 5/16	4 1/8	14	14 1/8	15	17	1	1 1/2	11/16	NUB0091	NUB0434
16	7/8	19 5/16	4 1/8	16	16 1/8	17	19	1	1 1/2	11/16	NUB0005	NUB0435
18	1	21 11/16	4 3/4	18	18 1/8	19 1/8	21 1/2	1 1/8	1 1/2	11/16	NUB0098	NUB0226
20	1	23 11/16	4 3/4	20	20 1/8	21 1/8	23 1/2	1 1/8	1 1/2	11/16	NUB0101	NUB0436
24	1	27 11/16	4 3/4	24	24 1/8	25 1/8	27 1/2	1 1/8	1 1/2	11/16	NUB0011	NUB0227
28	1	31 11/16	4 3/4	28	28 1/8	29 1/8	31 1/2	1 1/8	1 1/2	11/16	NUB0106	NUB0602
30	1	33 11/16	4 3/4	30	30 1/8	31 1/8	33 1/2	1 1/8	1 1/2	11/16	NUB0107	NUB0437
36	1	39 11/16	4 3/4	36	36 1/8	37 1/8	39 1/2	1 1/8	1 1/2	11/16	NUB0109	NUB0438

Oversize Nu-Bolts® (+3/16" ID)

1/2	1/4	3 1/4	2 3/8	1	1 1/8	1 3/8	2 11/16	3/8	3/4	5/16	NUB1481	NUB1488
3/4	1/4	3 5/16	2 3/8	1 3/16	1 5/16	1 9/16	3 3/16	3/8	3/4	5/16	NUB1482	NUB1489
1	1/4	3 7/16	2 3/8	1 7/16	1 9/16	1 13/16	3 3/16	3/8	3/4	5/16	NUB1483	NUB1490
1 1/4	3/8	3 3/4	2 1/2	1 3/4	1 7/8	2 1/4	3 11/16	1/2	1	7/16	NUB1484	NUB1491
1 1/2	3/8	4	2 1/2	2 1/16	2 3/16	2 9/16	4 3/16	1/2	1	7/16	NUB1485	NUB1492
2	3/8	4 1/2	2 1/2	2 1/2	2 5/8	3	4 11/16	1/2	1	7/16	NUB1486	NUB1493
2 1/2	1/2	5 1/4	3	3	3 1/8	3 5/8	5 3/16	5/8	1	7/16	NUB1487	NUB1494

NU-BOLT® WITH HIGH-TEMPERATURE POLYSHRINK™

[PDF I-Rod/Nu-Bolt temperature considerations](#)

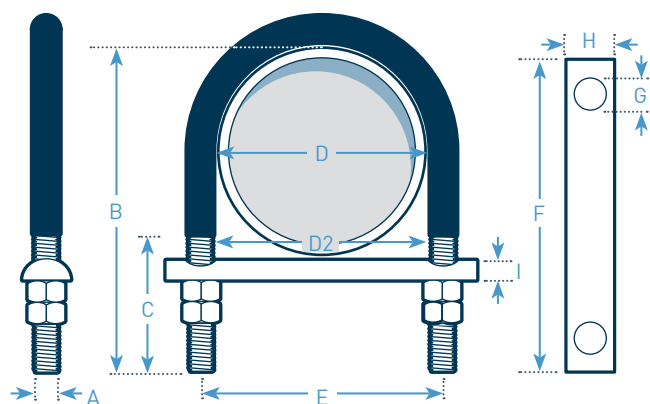

Includes:

- U-bolt with Polyshrink™
- Four nuts
- Cut and drilled I-Rod®

Note: Maximum operating temp for HT Polyshrink™ is 220° C.

Note: Nu-Bolts® are shipped unassembled; pre-assembled Nu-Bolts® are available for an additional charge.



**Galvanised
with I-Rod® HT
(amber)**

Max temp: 171° C





**316 Stainless
with I-Rod® HT
(amber)**

Max temp: 171° C

	A	B	C	D	D2	E	F	G	H	I		
Nominal pipe size	Bolt diameter	U-bolt height	Thread length	Inside gap	Inside gap without shrink	Leg center	I-Rod length	I-Rod hole diameter	I-Rod width	I-Rod height	Part number	Part number
1/2"	1/4"	3 1/4"	2 3/8"	13/16"	15/16"	1 3/16"	2 1/2"	3/8"	3/4"	5/16"	NUB0895	NUB0925
1/2	3/8	3 1/4	2 3/8	13/16	15/16	1 5/16	2 1/2	1/2	1	7/16	NUB0896	NUB0926
3/4	1/4	3 5/16	2 3/8	1	1 1/8	1 3/8	3	3/8	3/4	5/16	NUB0897	NUB0927
3/4	3/8	3 5/16	2 3/8	1	1 1/8	1 1/2	3	1/2	1	7/16	NUB0898	NUB0928
1	1/4	3 7/16	2 3/8	1 1/4	1 3/8	1 5/8	3	3/8	3/4	5/16	NUB0899	NUB0929
1	3/8	3 7/16	2 3/8	1 1/4	1 3/8	1 3/4	3	1/2	1	7/16	NUB0900	NUB0930
1 1/4	3/8	3 3/4	2 1/2	1 9/16	1 11/16	2 1/16	3 1/2	1/2	1	7/16	NUB0901	NUB0931
1 1/2	3/8	4	2 1/2	1 7/8	2	2 3/8	4	1/2	1	7/16	NUB0902	NUB0932
2	3/8	4 1/2	2 1/2	2 5/16	2 7/16	2 13/16	4 1/2	1/2	1	7/16	NUB0903	NUB0933
2 1/2	1/2	5 1/4	3	2 13/16	2 15/16	3 7/16	5	5/8	1	7/16	NUB0905	NUB0935
3	1/2	5 13/16	3	3 7/16	3 9/16	4 1/16	6	5/8	1	7/16	NUB0906	NUB0936
4	1/2	6 13/16	3	4 7/16	4 9/16	5 1/16	7	5/8	1	7/16	NUB0908	NUB0938
5	1/2	7 13/16	3	5 1/2	5 5/8	6 1/8	8	5/8	1	7/16	NUB0909	NUB0939
6	5/8	9 1/2	3 3/4	6 5/8	6 3/4	7 3/8	9	11/16	1	7/16	NUB0910	NUB0940
8	5/8	11 1/2	3 3/4	8 5/8	8 3/4	9 3/8	11	11/16	1	7/16	NUB0911	NUB0941
10	3/4	13 13/16	4	10 3/4	10 7/8	11 5/8	13 1/2	7/8	1 1/2	11/16	NUB0912	NUB0942
12	7/8	16 1/16	4 1/8	12 3/4	12 7/8	13 3/4	16	1	1 1/2	11/16	NUB0913	NUB0943
14	7/8	17 5/16	4 1/8	14	14 1/8	15	17	1	1 1/2	11/16	NUB0914	NUB0944
16	7/8	19 5/16	4 1/8	16	16 1/8	17	19	1	1 1/2	11/16	NUB0915	NUB0945
18	1	21 11/16	4 3/4	18	18 1/8	19 1/8	21 1/2	1 1/8	1 1/2	11/16	NUB0916	NUB0946
20	1	23 11/16	4 3/4	20	20 1/8	21 1/8	23 1/2	1 1/8	1 1/2	11/16	NUB0917	NUB0947
24	1	27 11/16	4 3/4	24	24 1/8	25 1/8	27 1/2	1 1/8	1 1/2	11/16	NUB0918	NUB0948
28	1	31 11/16	4 3/4	28	28 1/8	29 1/8	31 1/2	1 1/8	1 1/2	11/16	NUB0920	NUB0950
30	1	33 11/16	4 3/4	30	30 1/8	31 1/8	33 1/2	1 1/8	1 1/2	11/16	NUB0921	NUB0951
36	1	39 11/16	4 3/4	36	36 1/8	37 1/8	39 1/2	1 1/8	1 1/2	11/16	NUB0922	NUB0952

CUT AND DRILLED I-ROD® WITHOUT U-BOLT

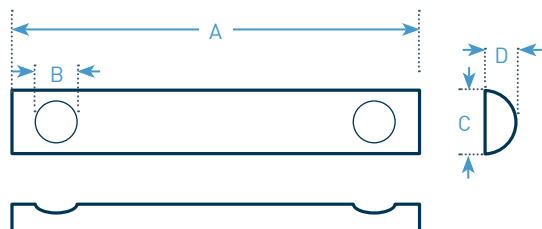PDF [I-Rod TechData Sheet](#)**I-Rod®
(white)**Min temp: -110° C
Max temp: 83° C**I-Rod® HT
(amber)**

Max temp: 171° C


**I-Rod® PEEK
(tan)**

Max temp: 249° C

	A	B	C	D				
Nominal pipe size	Bolt diameter	I-Rod length	I-Rod hole diameter	I-Rod width	I-Rod height	Part number	Part number	Part number
1/2"	1/4"	2 ½"	3/8"	3/4"	5/16"	ROD0105	ROD0141	ROD0332
1/2	3/8	2 ½	1/2	1	7/16	ROD0003	ROD0159	ROD0333
3/4	1/4	3	3/8	3/4	5/16	ROD0013	ROD0148	ROD0334
3/4	3/8	3	1/2	1	7/16	ROD0107	ROD0298	ROD0335
1	1/4	3	3/8	3/4	5/16	ROD0002	ROD0160	ROD0336
1	3/8	3	1/2	1	7/16	ROD0001	ROD0106	ROD0295
1 ¼	3/8	3 ½	1/2	1	7/16	ROD0076	ROD0232	ROD0337
1 ½	3/8	4	1/2	1	7/16	ROD0005	ROD0149	ROD0338
2	3/8	4 ½	1/2	1	7/16	ROD0009	ROD0087	ROD0303
2 ½	1/2	5	5/8	1	7/16	ROD0022	ROD0233	ROD0339
3	1/2	6	5/8	1	7/16	ROD0012	ROD0090	ROD0340
4	1/2	7	5/8	1	7/16	ROD0014	ROD0096	ROD0341
5	1/2	8	5/8	1	7/16	ROD0015	ROD0299	ROD0342
6	5/8	9	11/16	1	7/16	ROD0074	ROD0101	ROD0343
8	5/8	11	11/16	1	7/16	ROD0017	ROD0104	ROD0344
10	3/4	13 ½	7/8	1 ½	11/16	ROD0004	ROD0079	ROD0345
12	7/8	16	1	1 ½	11/16	ROD0006	ROD0081	ROD0346
14	7/8	17	1	1 ½	11/16	ROD0007	ROD0243	ROD0347
16	7/8	19	1	1 ½	11/16	ROD0008	ROD0300	ROD0296
18	1	21 ½	1 ⅛	1 ½	11/16	ROD0083	ROD0171	ROD0348
20	1	23 ½	1 ⅛	1 ½	11/16	ROD0010	ROD0140	ROD0349
24	1	27 ½	1 ⅛	1 ½	11/16	ROD0011	ROD0172	ROD0350
28	1	31 ½	1 ⅛	1 ½	11/16	ROD0088	ROD0382	ROD0383
30	1	33 ½	1 ⅛	1 ½	11/16	ROD0092	ROD0301	ROD0351
36	1	39 ½	1 ⅛	1 ½	11/16	ROD0093	ROD0302	ROD0352

STAINLESS STEEL AND SERMAGARD® NU-BOLTS®

PDF Nu-Bolt coatings test

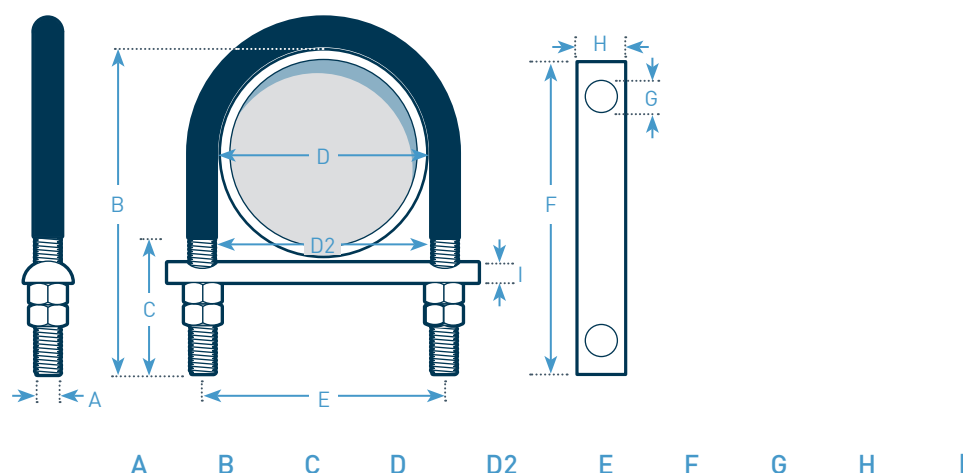

316 Stainless Nu-Bolt® with I-Rod® (white)

- Stainless U-bolt
- Standard I-Rod®
- Min. temp: -110°C
- Max. temp: 83°C
- Polyshrink™
- Four nuts




SERMAGARD® Nu-Bolt® with I-Rod® (white)

- Carbon steel U-bolt with SERMAGARD®
- Standard I-Rod®
- Max. temp: 83°C
- Polyshrink™
- Four nuts

	A	B	C	D	D2	E	F	G	H	I		
Nominal pipe size	Bolt diameter	U-bolt height	Thread length	Inside gap	Inside gap without shrink	Leg center	I-Rod length	I-Rod hole diameter	I-Rod width	I-Rod height	Part number	Part number
1/2"	1/4"	3 1/4"	2 3/8"	13/16"	15/16"	1 3/16"	2 1/2"	3/8"	3/4"	5/16"	NUB0113	NUB0415
1/2	3/8	3 1/4	2 3/8	13/16	15/16	1 5/16	2 1/2	1/2	1	7/16	NUB0609	NUB0132
3/4	1/4	3 5/16	2 3/8	1	1 1/8	1 3/8	3	3/8	3/4	5/16	NUB0123	NUB0149
3/4	3/8	3 5/16	2 3/8	1	1 1/8	1 1/2	3	1/2	1	7/16	NUB0610	NUB0650
1	1/4	3 7/16	2 3/8	1 1/4	1 3/8	1 5/8	3	3/8	3/4	5/16	NUB0114	NUB0491
1	3/8	3 7/16	2 3/8	1 1/4	1 3/8	1 3/4	3	1/2	1	7/16	NUB0038	NUB0133
1 1/2	3/8	4	2 1/2	1 7/8	2	2 3/8	4	1/2	1	7/16	NUB0116	NUB0135
2	3/8	4 1/2	2 1/2	2 5/16	2 7/16	2 13/16	4 1/2	1/2	1	7/16	NUB0018	NUB0137
2 1/2	1/2	5 1/4	3	2 13/16	2 15/16	3 7/16	5	5/8	1	7/16	NUB0442	NUB0440
3	1/2	5 13/16	3	3 7/16	3 9/16	4 1/16	6	5/8	1	7/16	NUB0119	NUB0012
4	1/2	6 13/16	3	4 7/16	4 9/16	5 1/16	7	5/8	1	7/16	NUB0120	NUB0144
5	1/2	7 13/16	3	5 1/2	5 5/8	6 1/8	8	5/8	1	7/16	NUB0277	NUB0441
6	5/8	9 1/2	3 3/4	6 5/8	6 3/4	7 3/8	9	11/16	1	7/16	NUB0121	NUB0147
8	5/8	11 1/2	3 3/4	8 5/8	8 3/4	9 3/8	11	11/16	1	7/16	NUB0125	NUB0150
10	3/4	13 13/16	4	10 3/4	10 7/8	11 5/8	13 1/2	7/8	1 1/2	11/16	NUB0127	NUB0152
12	7/8	16 1/16	4 1/8	12 3/4	12 7/8	13 3/4	16	1	1 1/2	11/16	NUB0128	NUB0155
14	7/8	17 5/16	4 1/8	14	14 1/8	15	17	1	1 1/2	11/16	NUB0390	NUB0157
16	7/8	19 5/16	4 1/8	16	16 1/8	17	19	1	1 1/2	11/16	NUB0129	NUB0006
18	1	21 11/16	4 3/4	18	18 1/8	19 1/8	21 1/2	1 1/8	1 1/2	11/16	NUB0232	NUB0159
20	1	23 11/16	4 3/4	20	20 1/8	21 1/8	23 1/2	1 1/8	1 1/2	11/16	NUB0130	NUB0160
24	1	27 11/16	4 3/4	24	24 1/8	25 1/8	27 1/2	1 1/8	1 1/2	11/16	NUB0131	NUB0161
30	1	33 11/16	4 3/4	30	30 1/8	31 1/8	33 1/2	1 1/8	1 1/2	11/16	NUB0616	NUB0559

METRIC GALVANISED NU-BOLT®

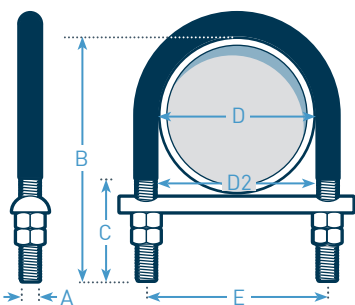

Includes:

- U-Bolt with Polyshrink™
- Four nuts
- Cut and drilled I-Rod® (max temp. +83c)


Note: Maximum operating temp for Polyshrink™ is 110°C.

Note: Nu-Bolts® are shipped unassembled; pre-assembled Nu-Bolts® are available for an additional charge.

Note: Metric Nu-Bolts® can also be ordered in non-gripping configurations with your choice of I-Rod® materials. Please contact us for additional information.

	A	B	C	D	D2	E	
Size [DN]	Bolt diameter	U-bolt height	Thread length	Inside gap	Gap/w/o shrink	Leg center	Part number
15	M10	83	60	20	23	33	NUB1799
20	M10	84	60	27	30	40	NUB1800
25	M10	87	60	35	38	48	NUB1792
32	M10	95	64	43	46	56	NUB1801
40	M10	102	64	49	52	62	NUB1793
50	M12	114	64	61	64	76	NUB1794
65	M12	133	76	79	82	94	NUB1802
80	M12	148	76	91	94	106	NUB1795
100	M16	173	76	117	120	136	NUB1796
125	M16	198	76	145	148	164	NUB1797
150	M16	241	95	173	176	192	NUB1798
200	M20	305	108	225	228	248	NUB1803
250	M20	351	102	279	282	302	NUB1804
300	M20	408	105	329	332	352	NUB1805
350	M24	440	105	375	378	402	NUB1806
400	M24	491	105	425	428	452	NUB1807
500	M24	602	121	527	530	554	NUB1808

GALVANISED NU-BOLT® WITH I-ROD® W/ FLATS

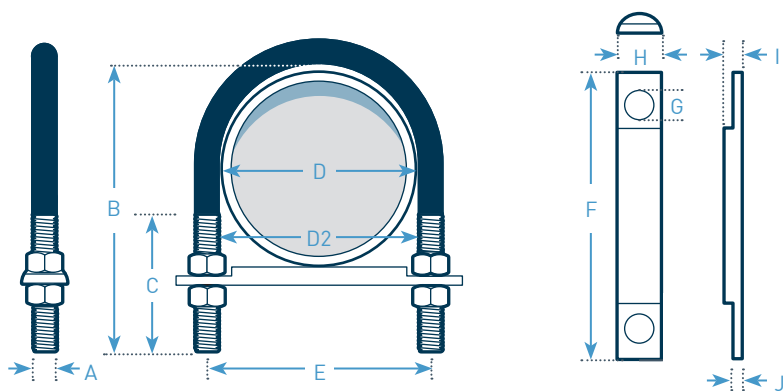PDF [How Non-Gripping Nu-Bolts Work](#)I-Rod®
W/ Flats
(white)

- Min temp: -110° C
- Max temp: 83° C


Non-gripping
Nu-Bolt®
(white)

- Galvanised U-bolt
- Standard I-Rod®
- 83° C max temp
- Polyshrink™
- Four nuts

	A	B	C	D	D2	E	F	G	H	I	J		
Nominal pipe size	Bolt diameter	U-bolt height	Thread length	Inside gap	Inside gap without shrink	Leg center	I-Rod length	I-Rod hole diameter	I-Rod width	I-Rod height	Tab thickness	Part number	Part number
1/2"	1/4"	3 1/4"	2 3/8"	13/16"	15/16"	1 3/16"	2 1/2"	3/8"	3/4"	5/16"	3/16"	ROD0391	NUB0563
3/4	1/4	3 5/16"	2 3/8"	1	1 1/8"	1 3/8"	3	3/8"	3/4"	5/16"	3/16"	ROD0392	NUB0564
3/4	3/8	3 5/16"	2 3/8"	1	1 1/8"	1 1/2"	3	1/2"	1	7/16"	1/4"	ROD0425	NUB0565
1	1/4	3 7/16"	2 3/8"	1 1/4"	1 3/8"	1 5/8"	3	3/8"	3/4"	5/16"	3/16"	ROD0393	NUB0566
1	3/8	3 7/16"	2 3/8"	1 1/4"	1 3/8"	1 3/4"	3	1/2"	1	7/16"	1/4"	ROD0394	NUB0567
1 1/2	3/8	4	2 1/2"	1 7/8"	2	2 3/8"	4	1/2"	1	7/16"	1/4"	ROD0396	NUB0568
2	3/8	4 1/2"	2 1/2"	2 5/16"	2 7/16"	2 13/16"	4 1/2"	1/2"	1	7/16"	1/4"	ROD0397	NUB0569
2 1/2	1/2	5 1/4"	3	2 13/16"	2 15/16"	3 7/16"	5	5/8"	1	7/16"	1/4"	ROD0398	NUB0570
3	1/2	5 13/16"	3	3 7/16"	3 9/16"	4 1/16"	6	5/8"	1	7/16"	1/4"	ROD0399	NUB0571
4	1/2	6 13/16"	3	4 7/16"	4 9/16"	5 1/16"	7	5/8"	1	7/16"	1/4"	ROD0400	NUB0572
5	1/2	7 13/16"	3	5 1/2"	5 5/8"	6 1/8"	8	5/8"	1	7/16"	1/4"	ROD0401	NUB0573
6	5/8	9 1/2"	3 3/4"	6 5/8"	6 3/4"	7 3/8"	9	11/16"	1	7/16"	1/4"	ROD0402	NUB0560
8	5/8	11 1/2"	3 3/4"	8 5/8"	8 3/4"	9 3/8"	11	11/16"	1	7/16"	1/4"	ROD0403	NUB0574
10	3/4	13 13/16"	4	10 3/4"	10 7/8"	11 5/8"	13 1/2"	7/8"	1 1/2"	11/16"	3/16"	ROD0404	NUB0575
12	7/8	16 1/16"	4 1/8"	12 3/4"	12 7/8"	13 3/4"	16	1	1 1/2"	11/16"	3/16"	ROD0405	NUB0576
14	7/8	17 5/16"	4 1/8"	14	14 1/8"	15	17	1	1 1/2"	11/16"	3/16"	ROD0406	NUB0577
16	7/8	19 5/16"	4 1/8"	16	16 1/8"	17	19	1	1 1/2"	11/16"	3/16"	ROD0407	NUB0561
18	1	21 11/16"	4 3/4"	18	18 1/8"	19 1/8"	21 1/2"	1 1/8"	1 1/2"	11/16"	3/16"	ROD0408	NUB0578
20	1	23 11/16"	4 3/4"	20	20 1/8"	21 1/8"	23 1/2"	1 1/8"	1 1/2"	11/16"	3/16"	ROD0409	NUB0579
24	1	27 11/16"	4 3/4"	24	24 1/8"	25 1/8"	27 1/2"	1 1/8"	1 1/2"	11/16"	3/16"	ROD0410	NUB0562
28	1	31 11/16"	4 3/4"	28	28 1/8"	29 1/8"	31 1/2"	1 1/8"	1 1/2"	11/16"	3/16"	ROD0412	NUB0722
30	1	33 11/16"	4 3/4"	30	30 1/8"	31 1/8"	33 1/2"	1 1/8"	1 1/2"	11/16"	3/16"	ROD0413	NUB0580
36	1	39 11/16"	4 3/4"	36	36 1/8"	37 1/8"	39 1/2"	1 1/8"	1 1/2"	11/16"	3/16"	ROD0414	NUB0581

GALVANISED NON-GRIPPING NU-BOLT® XL WITH I-ROD®

Nu-Bolt® XL utilises a U-bolt with an extra 1/4" of space for non-gripping applications.

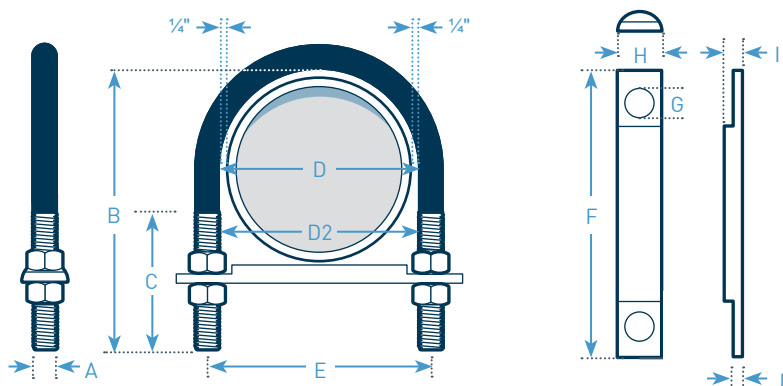

**Non-gripping
I-Rod® XL
(white)**

- Min temp: -110° C
- Max temp: 83° C

**Non-gripping
Nu-Bolt® XL
(white)**


- Galvanised U-bolt
- Standard I-Rod®
- 83° C max temp
- Polyshrink™
- Four nuts

	A	B	C	D	D2	E	F	G	H	I	J		
Nominal pipe size	Bolt diameter	U-bolt height	Thread length	Inside gap	Inside gap without shrink	Leg center	I-Rod length	I-Rod hole diameter	I-Rod width	I-Rod height	Tab thickness	Part number	Part number
1/2"	1/4"	3 1/4"	2 3/8"	1 5/16"	1 7/16"	1 11/16"	3"	3/8"	3/4"	5/16"	3/16"	ROD0632	NUB1458
3/4	1/4	3 5/16"	2 3/8"	1 1/2"	1 5/8"	1 7/8"	3 1/2"	3/8"	3/4"	5/16"	3/16"	ROD0633	NUB1459
3/4	3/8	3 5/16"	2 3/8"	1 1/2"	1 5/8"	2	3 1/2"	1/2"	1	7/16"	1/4"	ROD0634	NUB1460
1	1/4	3 7/16"	2 3/8"	1 3/4"	1 7/8"	2 1/8"	3 1/2"	3/8"	3/4"	5/16"	3/16"	ROD0635	NUB1461
1	3/8	3 7/16"	2 3/8"	1 3/4"	1 7/8"	2 1/4"	3 1/2"	1/2"	1	7/16"	1/4"	ROD0636	NUB1462
1 1/2	3/8	4	2 1/2"	2 3/8"	2 1/2"	2 7/8"	4 1/2"	1/2"	1	7/16"	1/4"	ROD0637	NUB1463
2	3/8	4 1/2"	2 1/2"	2 13/16"	2 15/16"	3 5/16"	5	1/2"	1	7/16"	1/4"	ROD0638	NUB1464
2 1/2	1/2	5 1/4"	3	3 5/16"	3 7/16"	3 15/16"	5 1/2"	5/8"	1	7/16"	1/4"	ROD0639	NUB1465
3	1/2	5 13/16"	3	3 15/16"	4 1/16"	4 9/16"	6 1/2"	5/8"	1	7/16"	1/4"	ROD0640	NUB1466
4	1/2	6 13/16"	3	4 15/16"	5 1/16"	5 9/16"	7 1/2"	5/8"	1	7/16"	1/4"	ROD0641	NUB1467
5	1/2	7 13/16"	3	6	6 1/8"	6 5/8"	8 1/2"	5/8"	1	7/16"	1/4"	ROD0642	NUB1468
6	5/8	9 1/2"	3 3/4"	7 1/8"	7 1/4"	7 7/8"	9 1/2"	11/16"	1	7/16"	1/4"	ROD0643	NUB1469
8	5/8	11 1/2"	3 3/4"	9 1/8"	9 1/4"	9 7/8"	11 1/2"	11/16"	1	7/16"	1/4"	ROD0644	NUB1470
10	3/4	13 13/16"	4	11 1/4"	11 3/8"	12 1/8"	14	7/8"	1 1/2"	11/16"	3/16"	ROD0645	NUB1471
12	7/8	16 1/16"	4 1/8"	13 1/4"	13 3/8"	14 1/4"	16 1/2"	1	1 1/2"	11/16"	3/16"	ROD0646	NUB1472
14	7/8	17 5/16"	4 1/8"	14 1/2"	14 5/8"	15 1/2"	17 1/2"	1	1 1/2"	11/16"	3/16"	ROD0647	NUB1473
16	7/8	19 5/16"	4 1/8"	16 1/2"	16 5/8"	17 1/2"	19 1/2"	1	1 1/2"	11/16"	3/16"	ROD0648	NUB1474
18	1	21 11/16"	4 3/4"	18 1/2"	18 5/8"	19 5/8"	22	1 1/8"	1 1/2"	11/16"	3/16"	ROD0649	NUB1475
20	1	23 11/16"	4 3/4"	20 1/2"	20 5/8"	21 5/8"	24	1 1/8"	1 1/2"	11/16"	3/16"	ROD0650	NUB1476
24	1	27 11/16"	4 3/4"	24 1/2"	24 5/8"	25 5/8"	28	1 1/8"	1 1/2"	11/16"	3/16"	ROD0651	NUB1477
28	1	31 11/16"	4 3/4"	28 1/2"	28 5/8"	29 5/8"	32	1 1/8"	1 1/2"	11/16"	3/16"	ROD0652	NUB1478
30	1	33 11/16"	4 3/4"	30 1/2"	30 5/8"	31 5/8"	34	1 1/8"	1 1/2"	11/16"	3/16"	ROD0653	NUB1479
36	1	39 11/16"	4 3/4"	36 1/2"	36 5/8"	37 5/8"	40	1 1/8"	1 1/2"	11/16"	3/16"	ROD0654	NUB1480

I-ROD® STRIPS

[PDF](#) [How to order I-Rod](#)

I-Rod® by the foot is available in lengths of five feet, ten feet or one meter (3.28'). Ordering lengths of five feet rather than ten feet is usually more cost effective because of much lower shipping charges.



I-Rod® (white)

Min temp: -110° C
Max temp: 83° C



I-Rod® HT (amber)

Max temp 171° C



PEEK (tan)

Up to 249° C

I-Rod width	Height in inches	Length in feet	Part number	Part number	Part number
3/4"	5/16"	5'	IRD0056	IRD0357	IRD0360
1	7/16	5	IRD0034	IRD0233	IRD0344
1 ½	11/16	5	IRD0045	IRD0234	IRD0354
3/4	5/16	10	IRD0220	IRD0228	IRD0361
1	7/16	10	IRD0156	IRD0358	IRD0362
1 ½	11/16	10	IRD0371	IRD0359	IRD0363
3/4	5/16	3.28	IRD0055	IRD0364	IRD0365
1	7/16	3.28	IRD0030	IRD0337	IRD0338
1 ½	11/16	3.28	IRD0043	IRD0336	IRD0366

I-ROD® PLATE

I-Rod® material is also available in flat sheets for other uses where a strong thermoplastic surface with a low coefficient of friction is needed, such as between the two mating faces of a pipe shoe or

between two pieces of metal requiring electrical isolation. I-Rod® Plate is available in lengths of up to four feet and in various thicknesses, including 1/8", 3/16" and 1/4".




DETERMINING I-ROD® LOAD VALUES WEIGHT (LB) PER FOOT OF PIPING FULL OF WATER

The table shows conservative estimates of the total weight of a foot of pipe filled with water. Multiply this number by your support spacing to get total weight loading, then select the number of I-Rods® you'll need. Use 1-inch I-Rods® if pipe diameter is 8" or less; 1 ½ -inch I-Rod® is for piping 10" or greater in diameter. Do not mix rod sizes.

Maximum loading for each I-Rod®

1 inch I-Rod®: **3,629 kg (8,000 lbs)**
1 ½ inch I-Rod®: **4,536 kg (10,000 lbs)**




Use up to three rods to support desired weight.



Nominal pipe size	Outside diameter	Std	Sch 40	X-Strong	Sch 80	Sch 120	Sch 140	Sch 160	X-Strong
2"	2.375"	6	6	7	7			9	11
3	3.5	12	12	14	14			18	23
4	4.5	18	18	22	22	26		29	34
6	6.625	33	34	44	44	51		60	68
8	8.625	51	54	69	69	86	93	100	97
10	10.75	76	80	94	104	129	143	155	143
12	12.75	104	110	121	144	181	195	215	181
14	14	122	131	140	173	217	237	255	
16	16	151	171	171	224	280	310	332	
18	18	183	216	205	282	354	384	418	
20	20	217	261	242	346	432	447	514	
24	24	294	370	325	494	625	678	737	
26	26	337		370					
28	28	383		419					
30	30	431		470					
36	36	593	731	639					
42	42	780		834					

U-BOLTS WITH POLYSHRINK™

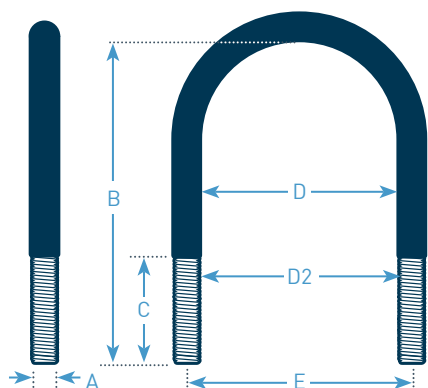

Note: Please see page 15 to order nuts.

Note: Maximum operating temp for Polyshrink™ is 110° C.



Galvanised




316 SS



SERMAGARD®

	A	B	C	D	D2	E			
Nominal pipe size	Bolt diameter	U-bolt height	Thread length	Inside gap	Inside gap without shrink	Leg center	Part number	Part number	Part number
1/2"	1/4"	3 1/4"	2 3/8"	13/16"	15/16"	1 3/16"	UBT0040	UBT0438	UBT0321
1/2	3/8	3 1/4	2 3/8	13/16	15/16	1 5/16	UBT0168	UBT0464	UBT0140
3/4	1/4	3 5/16	2 3/8	1	1 1/8	1 3/8	UBT0023	UBT0422	UBT0149
3/4	3/8	3 5/16	2 3/8	1	1 1/8	1 1/2	UBT0198	UBT0465	UBT0256
1	1/4	3 7/16	2 3/8	1 1/4	1 3/8	1 5/8	UBT0033	UBT0423	UBT0035
1	3/8	3 7/16	2 3/8	1 1/4	1 3/8	1 3/4	UBT0036	UBT0249	UBT0039
1 1/4	3/8	3 3/4	2 1/2	1 9/16	1 11/16	2 1/16	UBT0004	UBT0487	UBT0461
1 1/2	3/8	4	2 1/2	1 7/8	2	2 3/8	UBT0002	UBT0250	UBT0003
2	3/8	4 1/2	2 1/2	2 5/16	2 7/16	2 13/16	UBT0015	UBT0012	UBT0013
2 1/2	1/2	5 1/4	3	2 13/16	2 15/16	3 7/16	UBT0019	UBT0496	UBT0482
3	1/2	5 13/16	3	3 7/16	3 9/16	4 1/16	UBT0020	UBT0424	UBT0021
4	1/2	6 13/16	3	4 7/16	4 9/16	5 1/16	UBT0026	UBT0381	UBT0025
5	1/2	7 13/16	3	5 1/2	5 5/8	6 1/8	UBT0027	UBT0509	UBT0261
6	5/8	9 1/2	3 3/4	6 5/8	6 3/4	7 3/8	UBT0029	UBT0425	UBT0030
8	5/8	11 1/2	3 3/4	8 5/8	8 3/4	9 3/8	UBT0032	UBT0447	UBT0263
10	3/4	13 13/16	4	10 3/4	10 7/8	11 5/8	UBT0205	UBT0426	UBT0001
12	7/8	16 1/16	4 1/8	12 3/4	12 7/8	13 3/4	UBT0208	UBT0448	UBT0006
14	7/8	17 5/16	4 1/8	14	14 1/8	15	UBT0007	UBT0449	UBT0486
16	7/8	19 5/16	4 1/8	16	16 1/8	17	UBT0216	UBT0451	UBT0008
18	1	21 11/16	4 3/4	18	18 1/8	19 1/8	UBT0221	UBT0489	UBT0011
20	1	23 11/16	4 3/4	20	20 1/8	21 1/8	UBT0017	UBT0252	UBT0018
24	1	27 11/16	4 3/4	24	24 1/8	25 1/8	UBT0228	UBT0253	UBT0267
28	1	31 11/16	4 3/4	28	28 1/8	29 1/8	UBT0458	UBT0512	UBT0544
30	1	33 11/16	4 3/4	30	30 1/8	31 1/8	UBT0233	UBT0513	UBT0483
36	1	39 11/16	4 3/4	36	36 1/8	37 1/8	UBT0236	UBT0514	UBT0545

U-BOLTS WITH HIGH-TEMPERATURE POLYSHRINK™

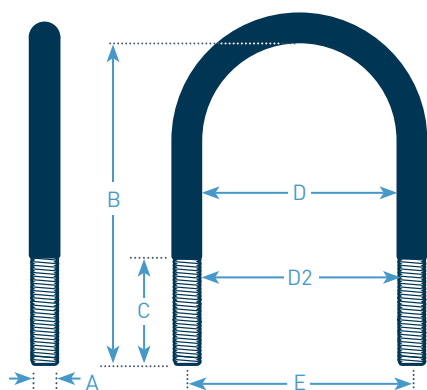

Note: Please see page 15 to order nuts.

Note: Maximum operating temp for HT Polyshrink™ is 220° C.




Galvanised



316 SS


	A	B	C	D	D2	E		
Nominal pipe size	Bolt diameter	U-bolt height	Thread length	Inside gap	Inside gap without shrink	Leg center	Part number	Part number
1/2"	1/4"	3 1/4"	2 3/8"	13/16"	15/16"	1 3/16"	UBT0752	UBT0722
1/2	3/8	3 1/4	2 3/8	13/16	15/16	1 5/16	UBT0753	UBT0723
3/4	1/4	3 5/16	2 3/8	1	1 1/8	1 3/8	UBT0754	UBT0724
3/4	3/8	3 5/16	2 3/8	1	1 1/8	1 1/2	UBT0755	UBT0725
1	1/4	3 7/16	2 3/8	1 1/4	1 3/8	1 5/8	UBT0756	UBT0726
1	3/8	3 7/16	2 3/8	1 1/4	1 3/8	1 3/4	UBT0757	UBT0727
1 1/4	3/8	3 3/4	2 1/2	1 9/16	1 11/16	2 1/16	UBT0758	UBT0728
1 1/2	3/8	4	2 1/2	1 7/8	2	2 3/8	UBT0759	UBT0729
2	3/8	4 1/2	2 1/2	2 5/16	2 7/16	2 13/16	UBT0760	UBT0730
2 1/2	1/2	5 1/4	3	2 13/16	2 15/16	3 7/16	UBT0762	UBT0732
3	1/2	5 13/16	3	3 7/16	3 9/16	4 1/16	UBT0763	UBT0733
4	1/2	6 13/16	3	4 7/16	4 9/16	5 1/16	UBT0765	UBT0735
5	1/2	7 13/16	3	5 1/2	5 5/8	6 1/8	UBT0766	UBT0736
6	5/8	9 1/2	3 3/4	6 5/8	6 3/4	7 3/8	UBT0767	UBT0737
8	5/8	11 1/2	3 3/4	8 5/8	8 3/4	9 3/8	UBT0768	UBT0738
10	3/4	13 13/16	4	10 3/4	10 7/8	11 5/8	UBT0769	UBT0739
12	7/8	16 1/16	4 1/8	12 3/4	12 7/8	13 3/4	UBT0770	UBT0740
14	7/8	17 5/16	4 1/8	14	14 1/8	15	UBT0771	UBT0741
16	7/8	19 5/16	4 1/8	16	16 1/8	17	UBT0772	UBT0742
18	1	21 11/16	4 3/4	18	18 1/8	19 1/8	UBT0773	UBT0743
20	1	23 11/16	4 3/4	20	20 1/8	21 1/8	UBT0774	UBT0744
24	1	27 11/16	4 3/4	24	24 1/8	25 1/8	UBT0775	UBT0745
28	1	31 11/16	4 3/4	28	28 1/8	29 1/8	UBT0776	UBT0747
30	1	33 11/16	4 3/4	30	30 1/8	31 1/8	UBT0778	UBT0748
36	1	39 11/16	4 3/4	36	36 1/8	37 1/8	UBT0779	UBT0749



I-ROD® CLIPS FOR 360° CLAMPS

[PDF I-Rod Clip Tech Data Sheet](#)

[Contact us for pricing on custom I-Rod® Clips]

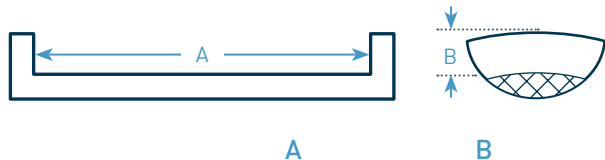

I-Rod® (white)

Min temp: -110° C


Max temp: 83° C



I-Rod® HT (amber)

Max temp: 171° C

Nominal pipe size	Inside gap	Internal radius	Recommended clips per clamp	Part number	Same clip with 1/4" smaller inside gap	Part number	Same clip with 1/4" smaller inside gap
3"	1 1/4"	2"	4	IRD0504	IRD0190 1" gap	IRD0513	IRD0280 1" gap
4	1 1/2"	2 1/2"	4	IRD0505	IRD0191 1 1/4"	IRD0514	IRD0281 1 1/4"
6	1 3/4"	3 9/16"	6	IRD0506	IRD0192 1 1/2"	IRD0515	IRD0169 1 1/2"
8	1 3/4"	4 9/16"	8	IRD0507	IRD0193 1 1/2"	IRD0516	IRD0282 1 1/2"
10	2 1/4"	5 5/8"	8	IRD0508	IRD0194 2"	IRD0517	IRD0283 2"
12	2 1/4"	None	8	IRD0509	IRD0195 2"	IRD0518	IRD0284 2"
14	2 3/4"	None	8	IRD0510	IRD0196 2 1/2"	IRD0519	IRD0285 2 1/2"
16-20	2 3/4"	None	10	IRD0510	IRD0196 2 1/2"	IRD0519	IRD0285 2 1/2"
24	3 1/4"	None	12	IRD0511	IRD0200 3"	IRD0520	IRD0170 3"
26-28	3 1/4"	None	14	IRD0511	IRD0200 3"	IRD0520	IRD0170 3"
30-36	4 1/4"	None	16	IRD0512	IRD0202 4"	IRD0521	IRD0224 4"



METRIC CLIPS FOR 360° CLAMPS


[Fits QPS/Carpenter & Paterson 360° clamps]



I-Rod® (white)

Min temp: -110° C


Max temp: 83° C




I-Rod® HT (amber)

Max temp: 171° C

Nominal pipe size	Inside gap	Recommended clips per clamp	Part number	Part number
80 mm	40 mm	4	IRD0259	IRD0298
100	50	4	IRD0260	IRD0299
150	65	6	IRD0261	IRD0300
200	65	8	IRD0262	IRD0271
250	65	8	IRD0263	IRD0301
300	80	8	IRD0264	IRD0302
350	90	8	IRD0265	IRD0303
400-500	90	10	IRD0265	IRD0303
550, 600	90	12	IRD0265	IRD0303
650, 700	110	14	IRD0266	IRD0306
750, 800	110	16	IRD0266	IRD0306




I-ROD® CLIPS FOR 120° CRADLES

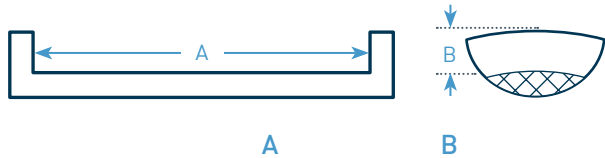

I-Rod® Clips

Min temp: -110° C
Max temp: 83° C



I-Rod® HT Clips

Max temp: 171° C

Nominal pipesize	Inside gap	Internal radius	Recommended clips per cradle	Part number	Same clip with 1/4" smaller inside gap	Part number	Same clip with 1/4" smaller inside gap
3"	4 1/4"	2"	2	IRD0531	IRD0204 4" gap	IRD0538	IRD0274 4" gap
4	4 1/4	2 1/2	2	IRD0532	IRD0205 4"	IRD0539	IRD0275 4"
6	4 1/4	3 9/16	4	IRD0533	IRD0206 4"	IRD0540	IRD0276 4"
6	6 1/4	3 9/16	4	IRD0534	IRD0314 6"	IRD0541	IRD0276 6"
8	4 1/4	4 9/16	4	IRD0535	IRD0207 4"	IRD0542	IRD0277 4"
10	4 1/4	5 5/8	4	IRD0536	IRD0208 4"	IRD0543	IRD0278 4"
12-14	4 1/4	None	4	IRD0512	IRD0202 4"	IRD0521	IRD0224 4"
16-18	4 1/4	None	6	IRD0512	IRD0202 4"	IRD0521	IRD0224 4"
20-24	6 1/4	None	6	IRD0537	IRD0213 6"	IRD0544	IRD0279 6"
26-36	6 1/4	None	8	IRD0537	IRD0213 6"	IRD0544	IRD0279 6"
12-30	8 1/4	None	N/A	IRD0494	IRD0312 8"	IRD0545	
12-30	9 1/4	None	N/A	IRD0561		—	
14-38	11 1/4	None	N/A	IRD0562		—	
42-48	12 1/4	None	N/A	IRD0563		—	

OVERSIZE I-ROD® CLIPS

FOR MECHANICAL JACK FLANGE SUPPORTS,
SPLIT SLIDING STEEL SUPPORTS, ETC.

We can accommodate non-standard I-Rod® Clip installations that require special dimensions. I-Rod® Clips can be ordered in any non-standard length and with any inside gap you need. Any variants you require can be ordered as bespoke items.

See page 17 for custom order forms.


Please contact us if you have questions.



DOUBLE-SIDED TAPE

For temporarily keeping I-Rod® in place during installation of I-Rod® Clips, beam dressing, etc.

Note: Tape is not used when I-Rod® is installed using I-Rod® Adhesive.



Tape width	Length per roll	Part no. (one roll)
1"	100'	MFR0008
1.5"	100'	MFR0009

HEAVY HEX NUTS



	Galvanised	316 SS	SERMAGARD®
Bolt diameter	Part number	Part number	Part number
1/4"	FAS0044	FAS0051	FAS0056
3/8	FAS0045	FAS0052	FAS0058
1/2	FAS0046	FAS0053	FAS0055
5/8	FAS0047	FAS0353	FAS0060
3/4	FAS0048	FAS0231	FAS0057
7/8	FAS0049	FAS0232	FAS0061
1	FAS0050	FAS0225	FAS0059

WASHERS



	Galvanised	316 SS	SERMAGARD®
Bolt diameter	Part number	Part number	Part number
1/4"	FAS0155	FAS0142	FAS0130
3/8	FAS0159	FAS0145	FAS0233
1/2	FAS0154	FAS0307	FAS0129
5/8	FAS0162	FAS0410	FAS0133
3/4	FAS0157	FAS0411	FAS0132
7/8	FAS0164	FAS0412	FAS0134
1	FAS0153	FAS0149	FAS0128

I-ROD® ADHESIVE

Permanently installs I-Rod® strips.

Note: Linear feet per 13.5 oz / 400 ml dual cartridge with 1:1 adhesive mix ratio.

Attention: Storage temperature between 7.8°C and 21°C. Application temperature between 7.8°C and 43.3°C. Operating temperature between -110°C and 83°C.



I-Rod® size

Please note: Bolting is always preferable if possible

	3/4"	1"	1 1/2"			
Substrate	Linear feet per cartridge			Bond thickness	Sq. in. per cartridge	Part number
Concrete	21'	16'	10'	0.125"	195 sq. in.	IRD0407
Steel*	64'	50'	32'	0.04"	610 sq. in.	IRD0407

*Painted, galvanised, or bare finish

[PDF Adhesive Installation Procedure](#)



APPLICATOR GUN

For dual cartridges; reusable.



Part number

IRD0554 (shown)

Heavy duty

NOZZLES

(Sold in bags of 10*)

Mixes cartridge contents.




Part number

IRD0408

*Two nozzles recommended per cartridge.

NU-BOLT® TORQUE VALUES

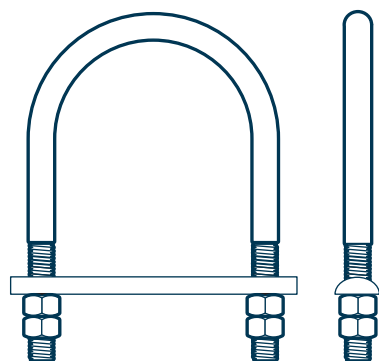

Thickness range: 1" to 1½" I-Rod®

Material: I-Rod® proprietary thermoplastic material, carbon steel U-bolt and four finished hex nuts.

Service: Recommended for pipes vulnerable to crevice corrosion and to support and guide heavy loads. Often employed in power, process plant and marine service.

Approvals: Complies with Federal Specification A-A1192A (Type 24), WW-H-171-E (Type 24), ANSI/MSS SP-69 and MSS SP-58 (Type 24)

Maximum loading for each I-Rod®:

1" I-Rod®: 3,629 kg (8,000 lb)

1½" I-Rod® HT: 4,536 kg (10,000 lb)

Use up to three rods to support desired weight.

Note: It is assumed that the U-bolts are not greased. The torque values on this sheet are general recommendations. Please contact us for more specific calculations.

Assumed coefficients of friction vs dry steel:

I-Rod®: 0.25

I-Rod® HT: 0.42

PEEK: 0.4

Assumed coefficients of friction on threads:

HDG 0.15

316SS: 0.17

SERMAGARD®: 0.12

Recommended torque values (lb-ft)





Bolt diameter	HDG I-Rod	HDG I-Rod HT	HDG PEEK	316SS I-Rod	316SS I-Rod HT	316SS PEEK	SERMAGARD® I-Rod	SERMAGARD® I-Rod HT	SERMAGARD® PEEK
1/4"	3	5	5	3	5	5	3	5	5
3/8	6	9	9	7	9	9	6	9	8
1/2	15	21	21	15	22	21	14	21	20
5/8	29	42	40	30	43	41	27	40	38
3/4	50	72	69	51	73	71	47	69	66
7/8	79	114	109	82	116	112	74	109	105
1	117	170	163	122	174	168	111	163	157

NU-BOLT® 3-D CAD MODELS

Download free CAD models of Nu-Bolt® assemblies for use in designing your next project. Hundreds of files are available for easy, free download in most popular CAD formats:

To download, please visit:

<https://www2.stoprust.com/i-rod-3d-models>

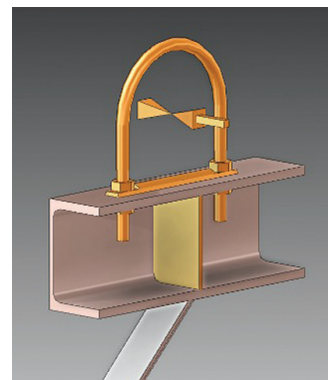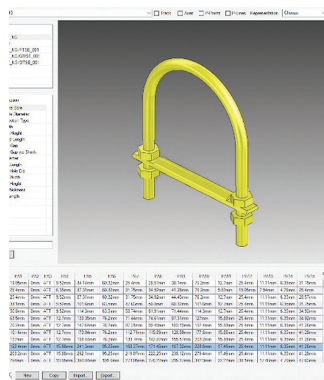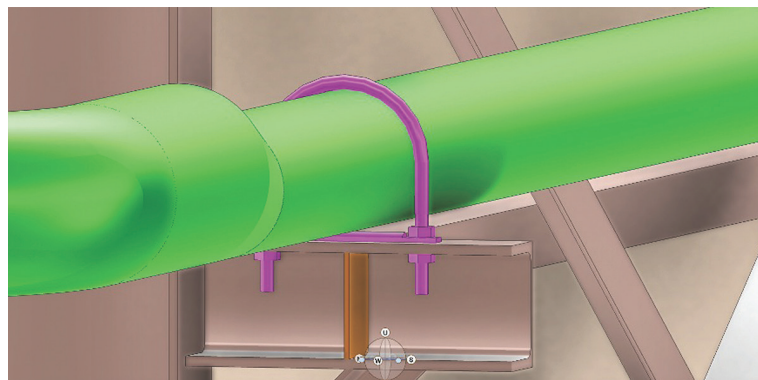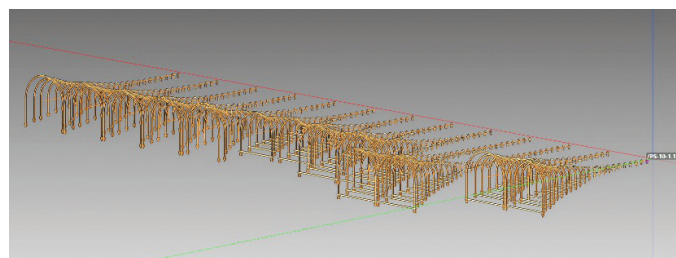

CUSTOM SIZES FOR ALL I-ROD® PRODUCTS ARE AVAILABLE

[PDF](#) [Download custom order forms](#)

Custom U-bolts

CUSTOM U-BOLT: DIMENSIONS

Please enter the dimensions and options required for your custom U-bolt in the boxes below:

Customer: _____
Company name: _____
Quantity: _____

Normal pipe size: _____
Options: _____
Polyshrink type: _____
Bolt material: _____
U-bolt height: _____
Throat length: _____
U-bolt width: _____
Number of nuts: _____

NOTE: Any flats left blank will be manufactured to our standard product specifications.

Responsible Corrosion Services Inc.
USA: +1 212 962 7171 (US) +44 20 1462 6500 (UK) +61 2 9112 2761 (Australia) +49 30 464 89 877 (Germany) +81 3 674 89 877 (Japan)
www.responsiblecorrosion.com

We can supply U-bolts with custom heights, longer thread lengths and larger or smaller inside gaps. Choose from galvanized, stainless steel and SERMAGARD® bolt finishes. Regular and high-temperature polyshrink can be added, too.

Custom I-Rod®

CUSTOM I-ROD: DIMENSIONS

Please enter the dimensions and options required for your custom I-Rod in the boxes below:

Customer: _____
Company name: _____
Quantity: _____

Normal pipe size: _____
Options: _____
I-Rod material: _____
Countersunk holes: _____
I-Rod overall length: _____
Hole diameter: _____
Center-to-center: _____

NOTE: Any flats left blank will be manufactured to our standard product specifications.

Responsible Corrosion Services Inc.
USA: +1 212 962 7171 (US) +44 20 1462 6500 (UK) +61 2 9112 2761 (Australia) +49 30 464 89 877 (Germany) +81 3 674 89 877 (Japan)
www.responsiblecorrosion.com

We also offer custom cut-and-drilled I-Rod® with custom hole sizes, countersunk holes and non-standard lengths, all of which are available in your choice of material: White (original) I-Rod®, I-Rod® HT and PEEK.

Custom I-Rod® with flats

CUSTOM I-ROD WITH FLATS: DIMENSIONS

Please enter the dimensions and options required for your custom I-Rod in the boxes below:

Customer: _____
Company name: _____
Quantity: _____

Normal pipe size: _____
Options: _____
I-Rod material: _____
Countersunk holes: _____
I-Rod overall length: _____
Hole diameter: _____
Center-to-center: _____
Optional flat length: _____
Optional flat thickness: _____

NOTE: Any flats left blank will be manufactured to our standard product specifications.

Responsible Corrosion Services Inc.
USA: +1 212 962 7171 (US) +44 20 1462 6500 (UK) +61 2 9112 2761 (Australia) +49 30 464 89 877 (Germany) +81 3 674 89 877 (Japan)
www.responsiblecorrosion.com

Custom cut-and-drilled I-Rod® with flats can be ordered with longer or shorter flats, custom hole sizes, countersunk holes and non-standard overall lengths. They're available in white I-Rod®, I-Rod® HT and PEEK materials.

Custom I-Rod® Clips

CUSTOM I-ROD CLIP: DIMENSIONS

Please enter the dimensions and options required for your custom I-Rod Clip in the boxes below:

Customer: _____
Company name: _____
Quantity: _____

Normal pipe size: _____
Options: _____
I-Rod material: _____
Clip overall length: _____
Hole diameter: _____
Center-to-center: _____

NOTE: Clip edges and inside thickness are always 1/2".

Responsible Corrosion Services Inc.
USA: +1 212 962 7171 (US) +44 20 1462 6500 (UK) +61 2 9112 2761 (Australia) +49 30 464 89 877 (Germany) +81 3 674 89 877 (Japan)
www.responsiblecorrosion.com

Custom I-Rod® Clips can be configured with non-standard inside gaps or manufactured without a radius when needed to better fit existing clamps. As with other I-Rod® products, they're also available in white I-Rod®, I-Rod® HT and PEEK.

RECOMMENDING I-ROD® / NU-BOLT® PRODUCTS BASED ON TEMPERATURE

Nu-Bolt® assemblies have two polymer components: The pipe support and the U-Bolt coating. There are three I-Rod® materials available and three possible U-Bolt options. Choosing the right Nu-Bolt® for your application can be tricky. Using these materials at temperatures outside of their rated range will result in

loss of strength (softening and melting), cracking and ultimately lead to failure. The following tables summarize key points and tested data for the materials. If no data is listed, it has not been tested. Some materials may perform outside of these boundaries, but they are not rated or proven to do so.

Table 1: Pipe support materials

Pipe support material	Temperature notes
I-Rod® (white)	Cryogenic and normal atmospheric temps
I-Rod® HT (amber)	For high temperature service
I-Rod® PEEK (tan)	High strength, high temperature service

U-bolt coating material	Temperature notes
Bare U-bolt	Cryogenic and extremely high temp service
Polyshrink™ (black, thick)	Medium temperature service
HT Polyshrink™ (black, thin)	High temperature service

Table 2: Nu-Bolt® polymer material temperature limits

Material	Max. excursion temp. (melt)	Max. continuous temp.	Min. continuous temp.
I-Rod® (white)	168° C / 329° F	83° C / 181° F	-110° C / -166° F
I-Rod® HT (amber)	210° C / 410° F	171° C / 340° F	(No data)
I-Rod® PEEK (tan)	340° C / 644° F	249° C / 480° F	(No data)
Polyshrink™ (black, thick)	(No data)	110° C / 230° F	-55° C / -67° F
HT Polyshrink™ (black, thin)	(No data)	220° C / 428° F	-55° C / -67° F
I-Rod® Adhesive	100° C / 212° F	50° C / 122° F	-40° C / -40° F

I-ROD® INSTALLATION

TIPS


Deepwater does not provide installation of I-Rod® assemblies. We also do not suggest that there's a certain correct I-Rod® installation process, as local codes, specifications and procedures for each operator and location should always be followed.

If piping has evidence of corrosion, a non-destructive evaluation of the pipe's integrity should be provided by a qualified piping engineer before attempting to lift it from the support. Here are a few tips for installing I-Rod® to help maximise its utility and durability:

1

Use the correct size I-Rod® for the pipe you're supporting.


I-Rod® comes in three widths: ¾", 1" and 1½". Refer to load value specifications in the table on page 3.



5

Clean the surface if you're using double-sided tape or adhesive.


Clean the pipe support surface before applying tape or adhesive to hold I-Rod® in place. (Tape and adhesive are on pages 14-15.)



2

Use the correct I-Rod® material for your operating temperature.


I-Rod® thermoplastic is rated for continuous temperatures up to 83°C (181°F), I-Rod® HT® up to 171°C (340°F) and PEEK up to 249°C (480°F).



6

The rounded I-Rod® surface must be in contact with the pipe.


The rounded edge of I-Rod® minimises the contact area, which prevents corrosion; pipe contact with the flat side cancels the main benefit of I-Rod®.



3

Use the correct number of I-Rod® strips.


Up to three strips can be used to achieve proper weight loading. Refer to load value specifications in the table on page 3.



7

Lock the Nu-Bolts®.


Secure Nu-Bolts® using the two sets of nuts provided. After tightening the first nut, thread a second one onto the same shaft and tighten it down to lock the nuts.

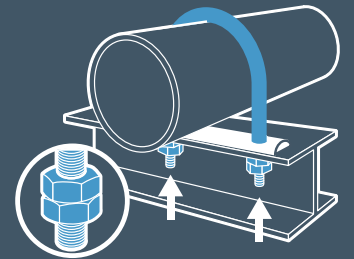

4

Where possible, there should be metal beneath the I-Rod®.


I-Rod® should be installed with rigid metal backing instead of directly on concrete, where irregular surfaces can cause uneven weight loads.



8

Add nut on top for non-gripping applications.

Slide Nu-Bolt® over pipe and thread a nut onto each shaft before placing through holes in I-Rod®. Adjust nut heights for desired clearance. Place nuts on bottom and tighten.




AUTHENTICITY

MAKE SURE YOUR I-ROD® IS AUTHENTIC

I-ROD® VS THE COMPETITION:

I-Rod® is stronger at any temperature

I-Rod® is superior to imitation materials throughout the entire range from extreme cold to extreme heat.

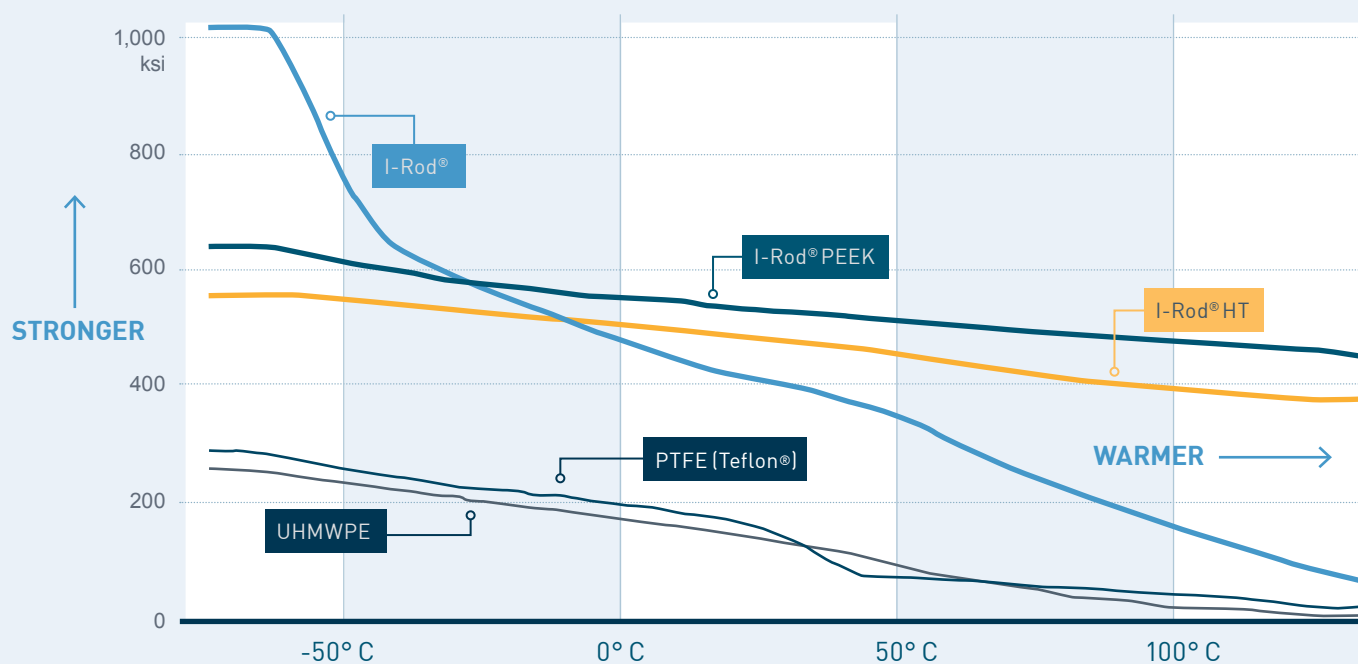


THE PROBLEM WITH CHEAP IMITATIONS

It's not a bargain if you have to replace it every few years.

THERE'S NO I-ROD® EQUIVALENT

- I-Rod® has a service life of 28 years or longer
- Imitations can fail immediately
- Contractors are liable if I-Rod® is specified and imitations are installed and fail
- Make sure supplier is selling genuine I-Rod®

Failed I-Rod® imitations.

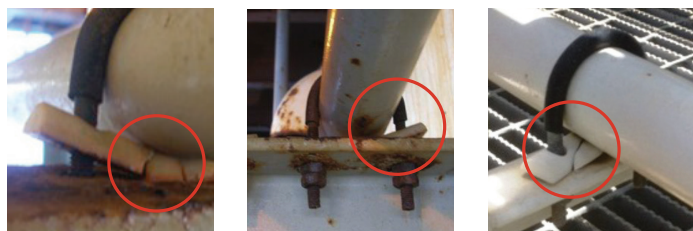

MAKE SURE YOUR I-ROD® IS AUTHENTIC

How to tell if your I-Rod® is genuine:

- All I-Rod® has a brand name and batch number printed as shown
- I-Rod® comes with a certificate of authenticity



Genuine I-Rod® with brand name and batch numbers



I-ROD® 28 YEAR STUDY

The following images were captured in 2017 during a routine topside inspection of the first offshore structure where I-Rod® pipe supports were specified. (See more photos at <https://stoprust.com/news-items/i-rod-28-year/>). The system was

installed in 1989 for less than \$10,000 USD. These photos show the long-term success of the system at 13 and 28 years when Deepwater Corrosion Services, Inc. visited the structures for inspections in 2002 and 2017.

2002: 13 years after installation



WET CONDITIONS

This fuel gas line is always wet (the green coloration is mold) and the beam paint system has failed, but no corrosion has occurred at the pipe support.

2017: 28 years after installation



FIFTEEN YEARS LATER...

28 years after installation, the fuel gas line shows some paint failure at the support but the I-Rod® is still intact.



LOW BEAM, HIGH-RISK

Another pipe that stays wet, as evidenced by the mold and mildew on its surface. At 13 years after installation, the support was performing well.



NO CREVICE CORROSION

28 years after installation, the coating is almost completely disintegrated and I-Rod® still successfully prevented crevice corrosion.



EXPOSED TO SPRAY AND SUN

This support remains well-preserved despite being exposed to harsh offshore conditions.



NEW PAINT, SAME NU-BOLT®

The Nu-Bolt® has received a few coats of paint over the decades but no new corrosion.