





# HOW TO ORDER I-ROD™ CLIPS


## THE MEASUREMENTS YOU'LL NEED:

**X: Diameter of pipe.** Either an exact measurement of the pipe and coating, or the pipe specs such as 8" or 10" API.


**Y: Width of clamp.** The clip snaps in place over the clamp.

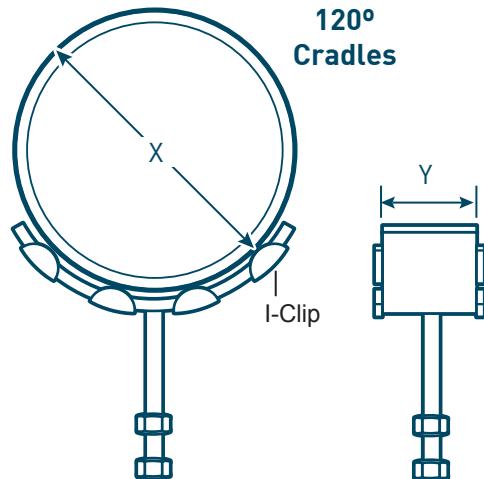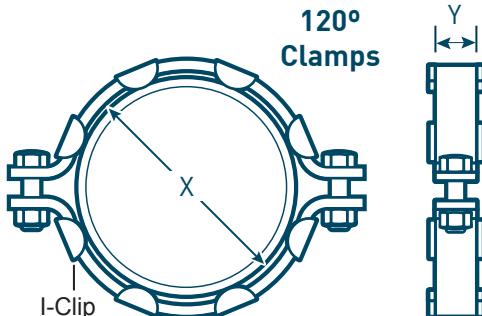

## WHAT ARE THE CLIP'S DIMENSIONS?

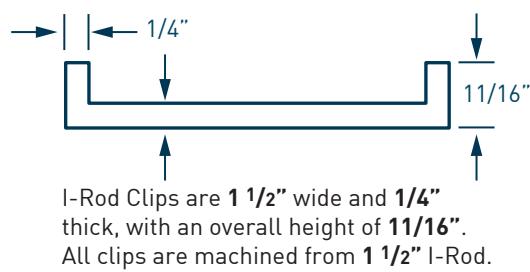

I-Rod Clips are **1 1/2"** wide and **1/4"** thick, with an overall height of **11/16"**. All clips are machined from **1 1/2"** I-Rod.

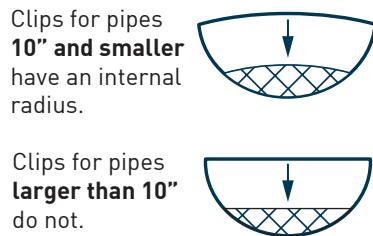


## WHAT'S THE OPERATING TEMPERATURE?



Determine your pipe's maximum operating temperature. Use standard I-Rod up to 181°F (83°C); use I-Rod HT up to 340°F (171°C) and PEEK for temperatures up to 480°F (249°C).



## NOTCHED I-ROD FOR STAINLESS STEEL TUBING

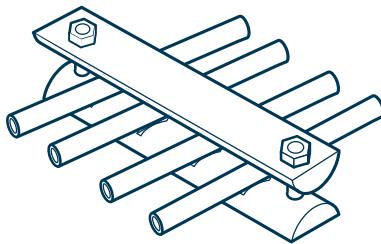

Notches are normally spaced **1/2", 5/8", 3/4" or 7/8"** apart.

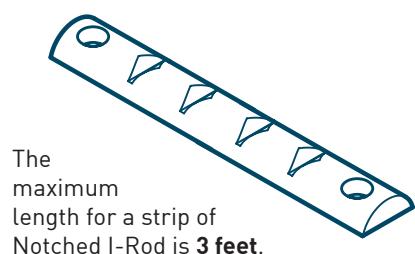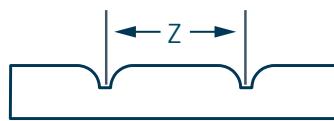

## WHERE DO YOU ORDER I-ROD?

To order I-Rod, please call us at **+1 (713) 983-7117** between 8 A.M. and 5 P.M. Central, or email us at [sales@stoprust.com](mailto:sales@stoprust.com). I-Rod is also available through our regional agents and Deepwater offices worldwide.

## HOW DOES IT SHIP?

The majority of our orders ship via **UPS**.



## WHAT'S THE LEAD TIME?

I-Rod Clips are machined once the order is placed, so there is normally a minimum **two-week lead time**. Please call for more info.

